



LW32 系列 万能转换开关


1 适用范围

LW32系列万能转换开关可代替(CA10、LW26)转换开关，主要用于交流50Hz或60Hz，额定工作电压380V及以下，直流电压220V及以下的控制线路中作主令控制用，也可直接控制小容量电动机。

符合标准：GB/T 14048.5 IEC 60947-5-1。

2 型号及含义

2.1 主令控制用转换开关

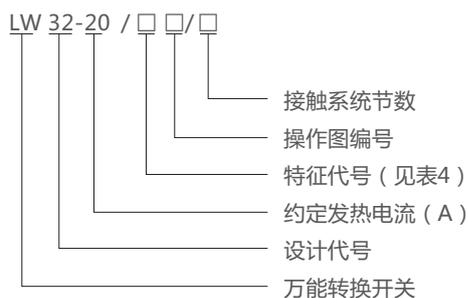

2.2 直接控制电动机用转换开关

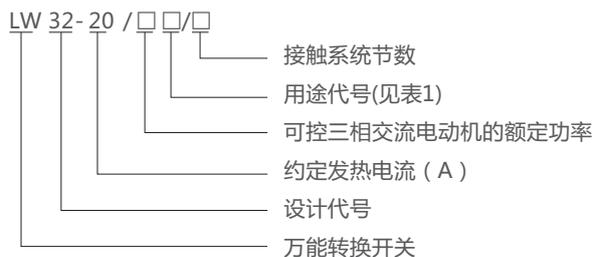


表1

用途代号	用途
Q1	直接起动
N1	可逆转换
S1	双速电动机变速

表2

Ue V	AC-15	DC-13
	Ie A	Ie A
380	2.6	
220		0.27

线电压测量开关

LW32-20/YH4/2		UAB	UBC	UCA
		90°	0°	90°
	1-2	x	x	
	3-4		x	x
	5-6			x
	7-8	x		

LW32-20/YH2/3		0	UAB	UBC	UCA
		0°	90°	180°	270°
	1-2		x	x	
	3-4				
	5-6				x
	7-8		x		
	9-10				
	11-12			x	x

LW32-20/YH3/3		0	UAB	UBC	UCA
		0°	90°	180°	270°
	1-2		x		
	3-4				x
	5-6			x	
	7-8		x		
	9-10				x
	11-12			x	x

三相线电压和三相相电压测量开关

LW32-20/YH5/4		UCA	UBC	UAB	0	UAN	UBN	UCN
		135°	90°	45°	0°	45°	90°	135°
	1-2		x					x
	3-4			x			x	
	5-6	x						
	7-8					x		
	9-10					x		x
	11-12	x		x				
	13-14						x	
	15-16			x				

LW32-20/YH5/3		UCA	UBC	UAB	0	UAN	UBN	UCN
		135°	90°	45°	0°	45°	90°	135°
	1-2		x					x
	3-4	x						
	5-6						x	
	7-8		x	x				
	9-10	x		x		x		
	11-12					x	x	x

电流测量转换开关

LW32-20/LH1/2 LW32-20/LH2/2		0	IA	IB	IC
		0°	90°	180°	270°
	1-2	x			x
	3-4		x	x	
	5-6	x	x		
	7-8			x	x

LW32-20/LH2/4		0	IA	IB	IC
		0°	90°	180°	270°
	1-2	x	x	x	
	3-4	x		x	x
	5-6	x	x		x
	7-8		x	x	x
	9-10				x
	11-12		x		
	13-14			x	
	15-16	x			

控制电器

LW32-20/LH3/4		0	IA	IB	IC
		0°	90°	180°	270°
	1-2	x	x		x
	3-4				
	5-6	x		x	x
	7-8	x	x	x	
	9-10			x	
	11-12				
	13-14		x		
	15-16				x

电动机直接起动开关

LW32-20/5.5Q1/2		0	1
		0°	60°
	1-2		x
	3-4		x
	5-6		x
	7-8		


电动机可逆转换开关

LW32-20/5.5N1/3		1	0	2
		60°	0°	60°
	1-2	x		x
	3-4	x		x
	5-6	x		
	7-8			x
	9-10			x
	11-12	x		

双速电动机变速开关

LW32-20/5.5S1/4		1	0	2
		60°	0°	60°
	1-2	x		
	3-4	x		x
	5-6			x
	7-8	x		
	9-10			x
	11-12			x
	13-14	x		
	15-16			x

4 外形及安装尺寸

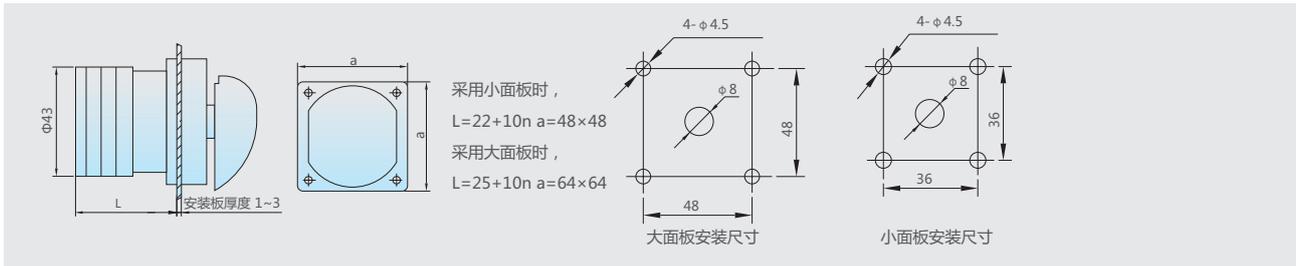

5 订货须知

用户订货时，采用开关的完整型号进行订货。

例如：订货万能转换开关LW32，接线图型式为订货代号为LW32-20/D303/2 100台。

尊敬的客户，您好！

由于该产品防护等级为IP00,不具备防尘能力，请在安装和使用的时候尽量保持产品的清洁。

接线图编号	D303		
转换角度	45°	0°	45°
1-2	x		x
3-4	x		
5-6			x
7-8	x		x

100台