



### 基本参数

		CDM3L-250	CDM3L-400	CDM3L-630
额定电压Ue(V)		230(2P)/400/415	400/415	400
额定电流In(A)		100/125/140/160/180/200/225/250	200/225/250/315/350/400	400/500/630
额定绝缘电压Ui(V)		800	800	800
额定冲击耐受电压Uimp(KV)		8	8	8
极数Pole		2/3/4 (A,B)	3/4 (A,B)	3/4 (A,B)
额定剩余动电流 IΔn mA (三档可调)	非延时型	30mA,100mA,300mA	100mA,300mA,500mA	100mA,300mA,500mA
		100mA,300mA,500mA	300mA, 500mA, 1000mA	300mA, 500mA, 1000mA
	延时型	100mA,300mA,500mA	100mA,300mA,500mA	100mA,300mA,500mA
			300mA, 500mA, 1000mA	300mA, 500mA, 1000mA
额定剩余不动作电流 IΔno mA		50% IΔn	50% IΔn	50% IΔn
非延时型: 分断时间s		≤0.1	≤0.1	≤0.1
固定延时: 2IΔn 极限不驱动时间s (特殊订货)		0.1/0.2/0.3/0.4/0.5/1	0.1/0.2/0.3/0.4/0.5/1	-
延时可调型: 2IΔn时的极限不驱动时间 s (常规)		Y1: 0.1/0.2/0.3s	Y1: 0.1/0.2/0.3s	0.1/0.3/0.5s
		Y2: 0.4/0.5/1s	Y2: 0.4/0.5/1s	/
分断能力		C(3/4P)    S    F(3/4P)	F    N	F    N
Icu (415V)		20    35    50	50    70	50    70
Ics (415V)		12    21    30	30    42	30    40
额定剩余短路接通能力 IΔm(KA)		25% Icu    25% Icu	25% Icu	25% Icu

### 基本参数

		CDM3L-125			CDM3L-160		
额定电压Ue(V)		230(2P)/400/415			230(2P)/400/415		
额定电流In(A)		16/20/25/32/40/50/63/80/100/125			100/125/140/160		
额定绝缘电压Ui(V)		800			800		
额定冲击耐受电压Uimp(KV)		8			8		
极数Pole		2/3/4 (A,B)			2/3/4 (A,B)		
额定剩余动电流 I $\Delta$ n mA (三档可调)	非延时型	30mA,100mA,300mA			30mA,100mA,300mA		
		100mA,300mA,500mA			100mA,300mA,500mA		
	延时型	100mA,300mA,500mA			100mA,300mA,500mA		
额定剩余不动作电流 I $\Delta$ no mA		50% I $\Delta$ n			50% I $\Delta$ n		
非延时型: 分断时间s		≤0.1			≤0.1		
固定延时: 2I $\Delta$ n 极限不驱动时间s (特殊订货)		0.1/0.2/0.3/0.4/0.5/1			0.1/0.2/0.3/0.4/0.5/1		
延时可调型: 2I $\Delta$ n时的极限不驱动时间 s (常规)		Y1: 0.1/0.2/0.3s			Y1: 0.1/0.2/0.3s		
		Y2: 0.4/0.5/1s			Y2: 0.4/0.5/1s		
分断能力		C(3/4P)	S	F(3/4P)	C(3/4P)	S	F(3/4P)
Icu (415V)		20	35	50	20	35	50
Ics (415V)		12	21	30	12	21	30
额定剩余短路接通能力 I $\Delta$ m(KA)		25% Icu	25% Icu		25% Icu	25% Icu	

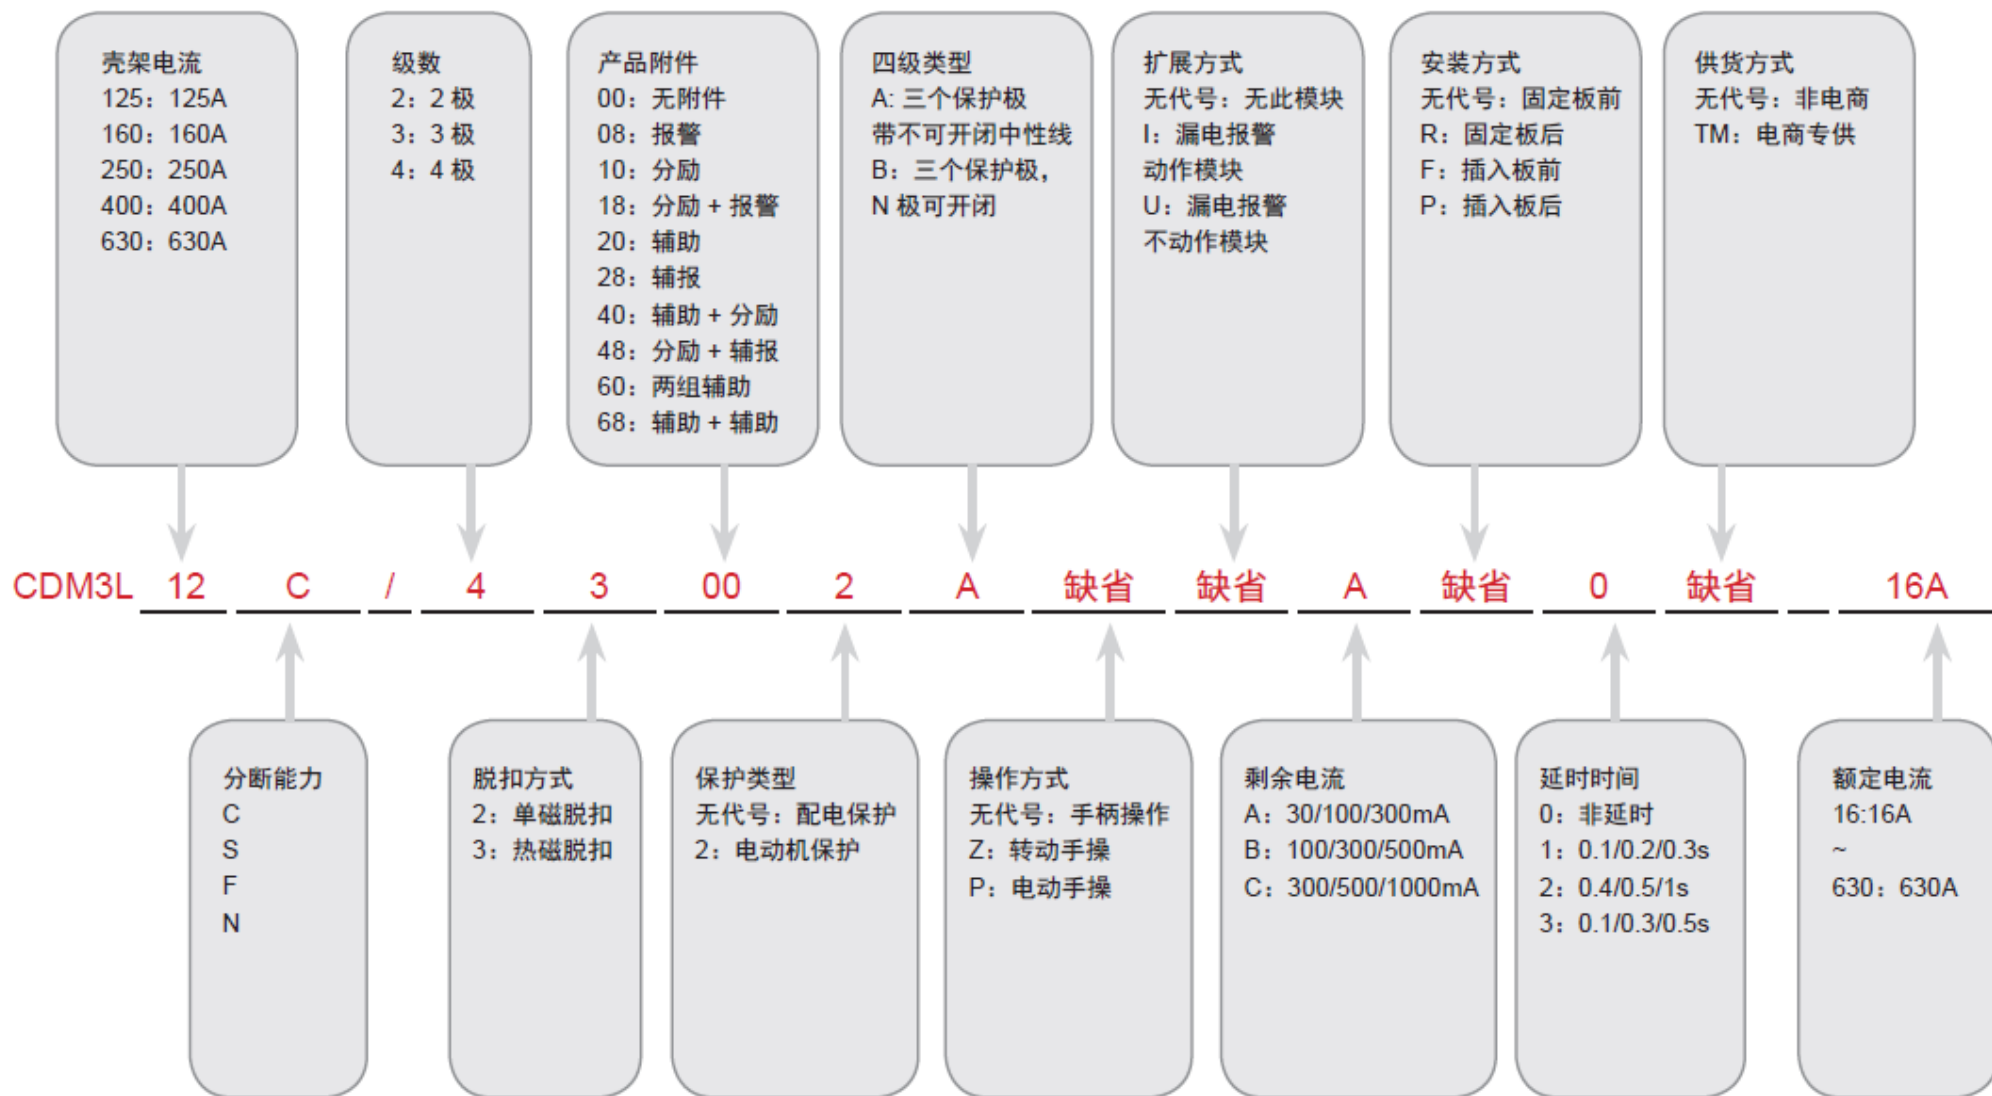

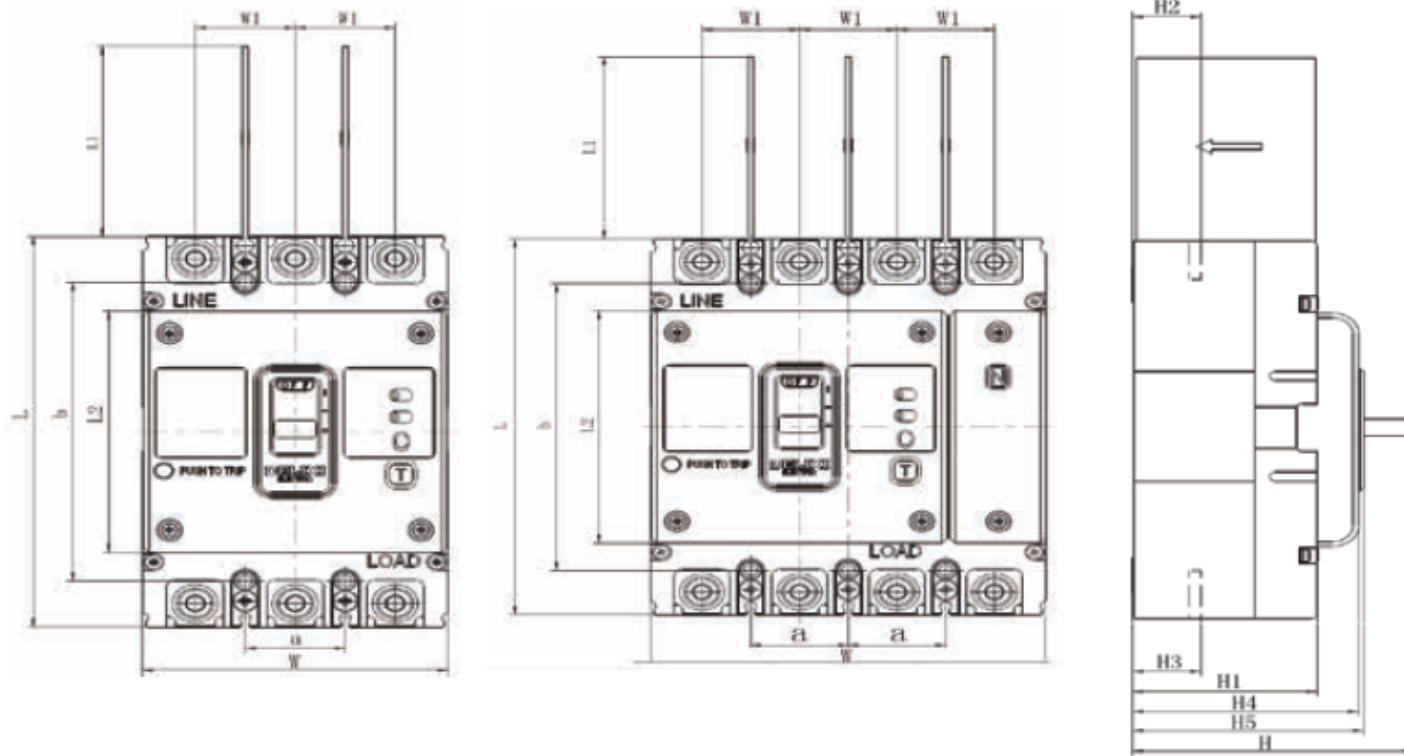

壳架	极数	外形尺寸											安装尺寸	
		L	L1	L2	W	W1	H	H1	H2	H3	H4	H5	a	b
125	2P	150	50	50	62	30	92	65	26	26	72	81	30	129
	3P			96	92		111.5	81	28.5	28	93.5	95.5		
	4P			122										
160/250	2P	165	65	96	75	35	95	68	24	24	74	78	35	126
	3P		80	102	107		112.5	80	23	23	94	95.5		
	4P		142											
400	3P	257	104.5	150	150	48	145.9	96.2	36	36/36.5	107.5	112.5	44	215
	4P				198									
630	3P	280	102	102	210	70	160	108	40.5	41.5	111	119	70	243
	4P				280									