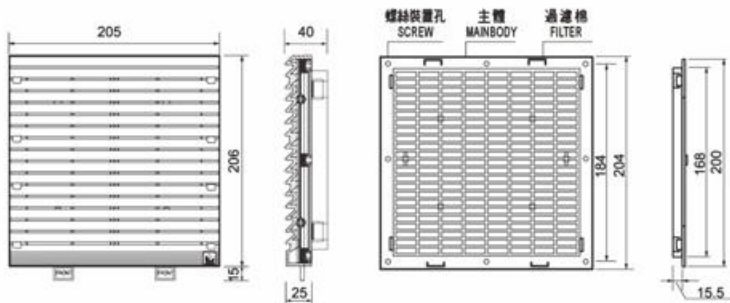
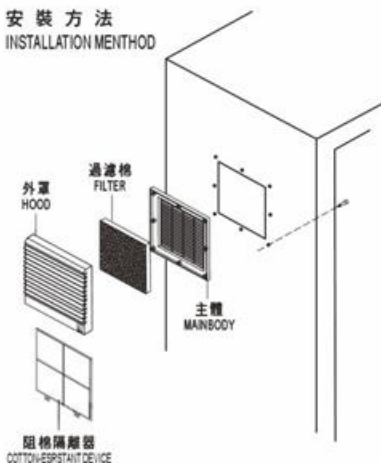



紡織設備控制櫃專用！ Uniquely used in the textile facilities!
防塵！ 防水！ Dust-resistance! Water-resistance!
防棉絮！ Cotton-resistance!
 三重防護新概念！ New concept of triple-protection!


 安裝方法
 INSTALLATION METHOD

 開孔尺寸
 PANEL OPENING SIZE


UNIT=mm

功用 Function

- 紡織設備及特殊機械設備控制櫃專用。
- 徹底防止棉絮侵入控制櫃內部，無須工具，即可清除金屬阻棉隔離器上之棉絮及塵、屑。
- 搭配電氣控制櫃專用一密封墊圈（SGR系列）可有效提升IP值至IP54。
- Uniquely used in the textile facility and special mechanical control cabinet.
- Thoroughly prevent the cotton from going into the bottom of the cabinet. Clean up the cotton and dust on the cotton-resistance device simply without any tools.

材質 Material

- ABS樹脂材質，添加難燃及抗紫外線特性。
- 前置不鏽鋼材質阻棉隔離器，後置尼龍纖維和成樹脂，除塵率高達AFI 86%（AFI=JAPAN AIR FILTER INSTITUTE）。
- Inflammable and UV-resistance is ABS material.
- With stainless steel cotton-resistance device in the hood and Nylon.

創新設計 Innovative design

- 超薄型、快速安裝系統設計，保證最佳空氣流量。
- 通風口部採45度角創新設計，美觀大方。
- 三重防護新概念！（防塵、防水、防棉絮）
- Best air flow is ensured due to the Ultra thin and quick install system design.
- 45 degree angle design of the ventilator opening is new and good looking.
- New concept of triple-protection (Dust-resistance; water-resistance; cotton-resistance)