

## ■ 特性

型 式	規 格	安裝型式	接線端子	外殼材質
TBSN-310/-W	3Ø10A 1.5KW	露出型	M3.5	鐵烤漆
TBSN-315/-W	3Ø15A 2.2KW	露出型	M4	鐵烤漆
TBSN-330/-W	3Ø30A 3.7KW	露出型	M5	鐵烤漆
TBSY-315/-W 330/-W	3Ø 15A 2.2KW 30A 3.7KW	埋入型	M4	鐵烤漆
TBSS-315/-W 330/-W	3Ø 15A 2.2KW 30A 3.7KW	埋入型	M4	鐵烤漆
TBSP-315	3Ø15A 2.2KW	露出型	M3.5	強化塑膠
TBSP-330	3Ø30A 3.7KW	露出型	M4	強化塑膠


●註：W型為增加矽膠保護套

## ■ 外形尺寸

TBSN-310




TBSN-310-W

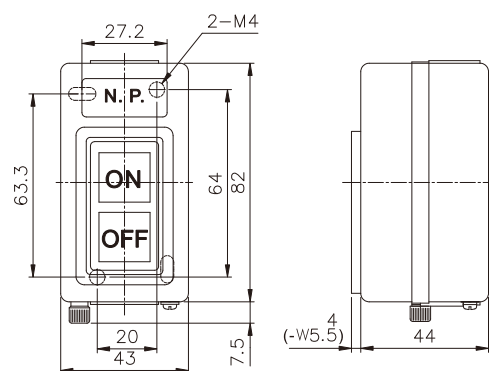

TBSN-315




TBSN-315-W

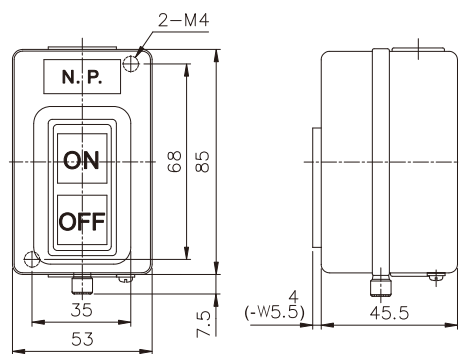

TBSN-330




TBSN-330-W

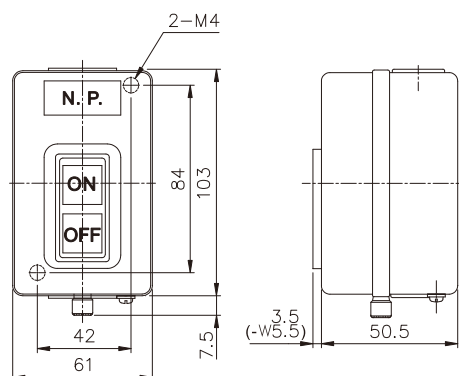


# tend 動力押扣開關


TBSY-315,330

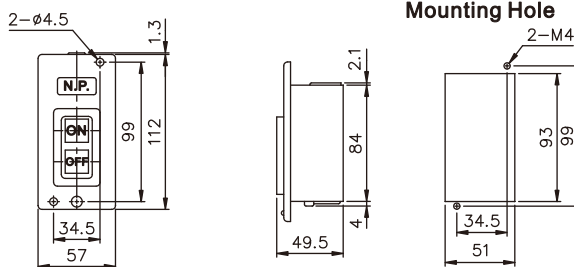


TBSS-315,330

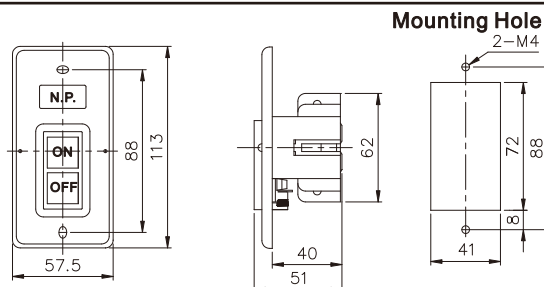

TBSP-315

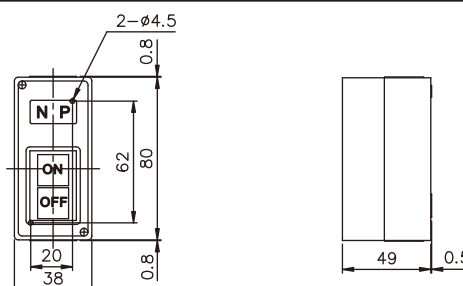


TBSP-330

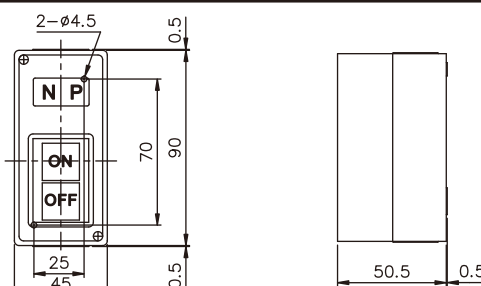

# tend 按鈕開關

TPB-2

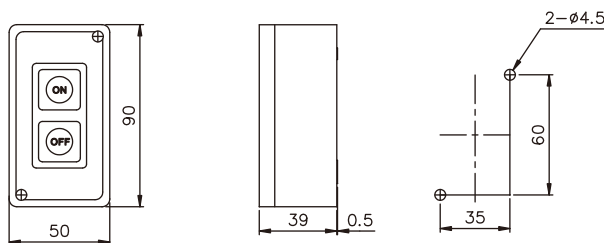

TPB-3

